


**AT2000R AirTite R-Series Single Speed:**

<b>Torque Range</b>	671 - 1969 ft-lb	Precise and Accurate - +/-5%
	910 - 2670 nm	
<b>Square Drive (B):</b>	1 in	Filter/Regulator/Lubricator Assembly
<b>D1**</b>	2.13 in	Pressure to Torque Chart
	54 mm	
<b>D2</b>	3.35 in	360 Degree Articulating Motor
	85 mm	
<b>D3</b>	3.46 in	15 ft. hose assy
	88 mm	
<b>Height:</b>	11.81 in	Operation / Maintenance Manual
	300 mm	
<b>Free Speed (rpm)</b>	8	QUIET - 66-78 dB(A)
<b>Weight (without support)</b>	19.84 lb	1/2% Accurate Pressure Gauge
	9 kg	

*(AirTite R-Series Accessories Professional Pictures)*

<b>ACCESORIES</b>	
<b>ARA-16-54-DW</b>	Deep Reaction Arm
<b>ARA-16-54-CN</b>	Crab-Nut Reaction Arm
<b>ARA-16-54-ML</b>	Mill Liner/Extended Reaction Arm
<b>SRA-16-54</b>	Straight Reaction Arm
<b>PSR-16-54</b>	Splined Reaction Ring
<b>SDE-16-54-13</b>	Sq. Dr. Extension 13"
<b>SR-54</b>	Safety Ring

**AT2000R FLOW CHART  
AIRTITE PNEUMATIC TORQUE WRENCH**

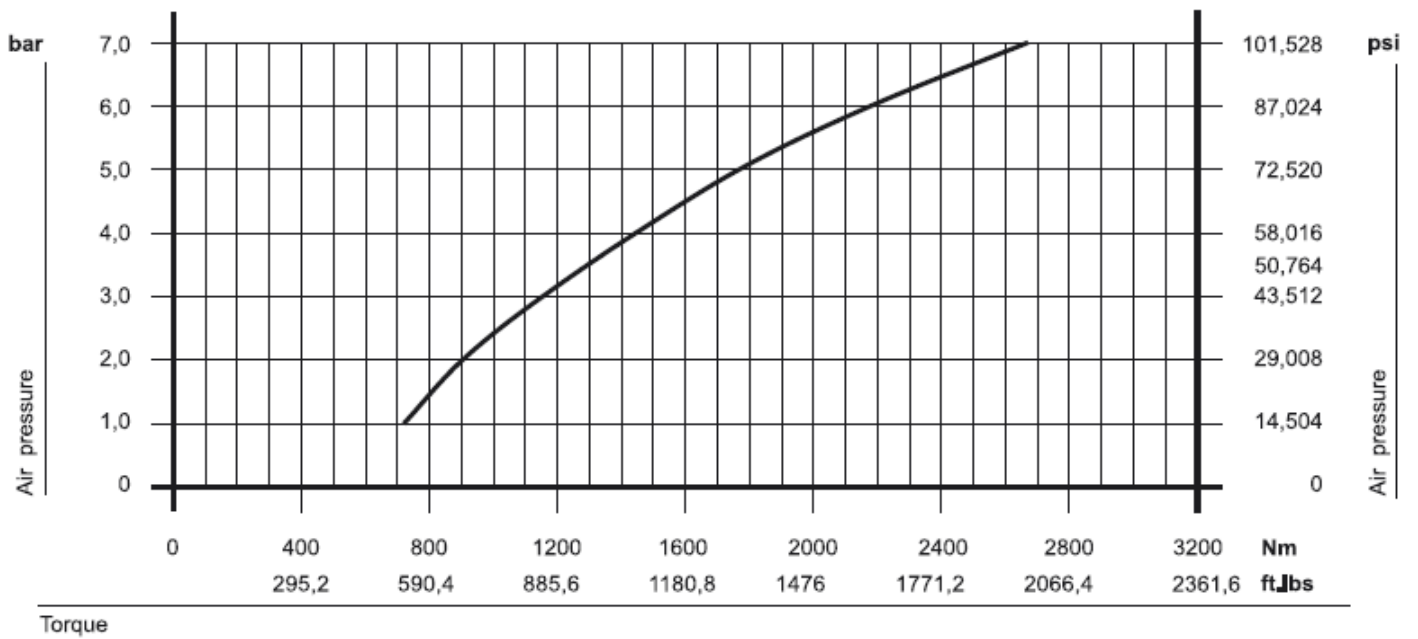

**All curves are approximate values. Unstable compressed air values can cause derivations.**

Torque Table		
	NM	Ft Lbs
bar	max	max
2	910	670
3	1150	848
4	1455	1073
5	1780	1314
6	2180	1609
7	2670	1970

**Operating pressure on the machine.**

**Air consumption: 21 – 32 cfm.**